

SP4034 NY-SS

Polypropylene

Diameter of bristles 0.40 mm - Acid Proof


Polypropylene bristles/stainless steel frame

External diameter: 40 mm

Turns 34

Application:

1. to remove residual lubricant and excess coating from wires
2. gently wipe and brush the surface even of softer metals
3. elimination of drag out or carry over from one bath to the next
4. these brushes can be used in acid and alkaline systems

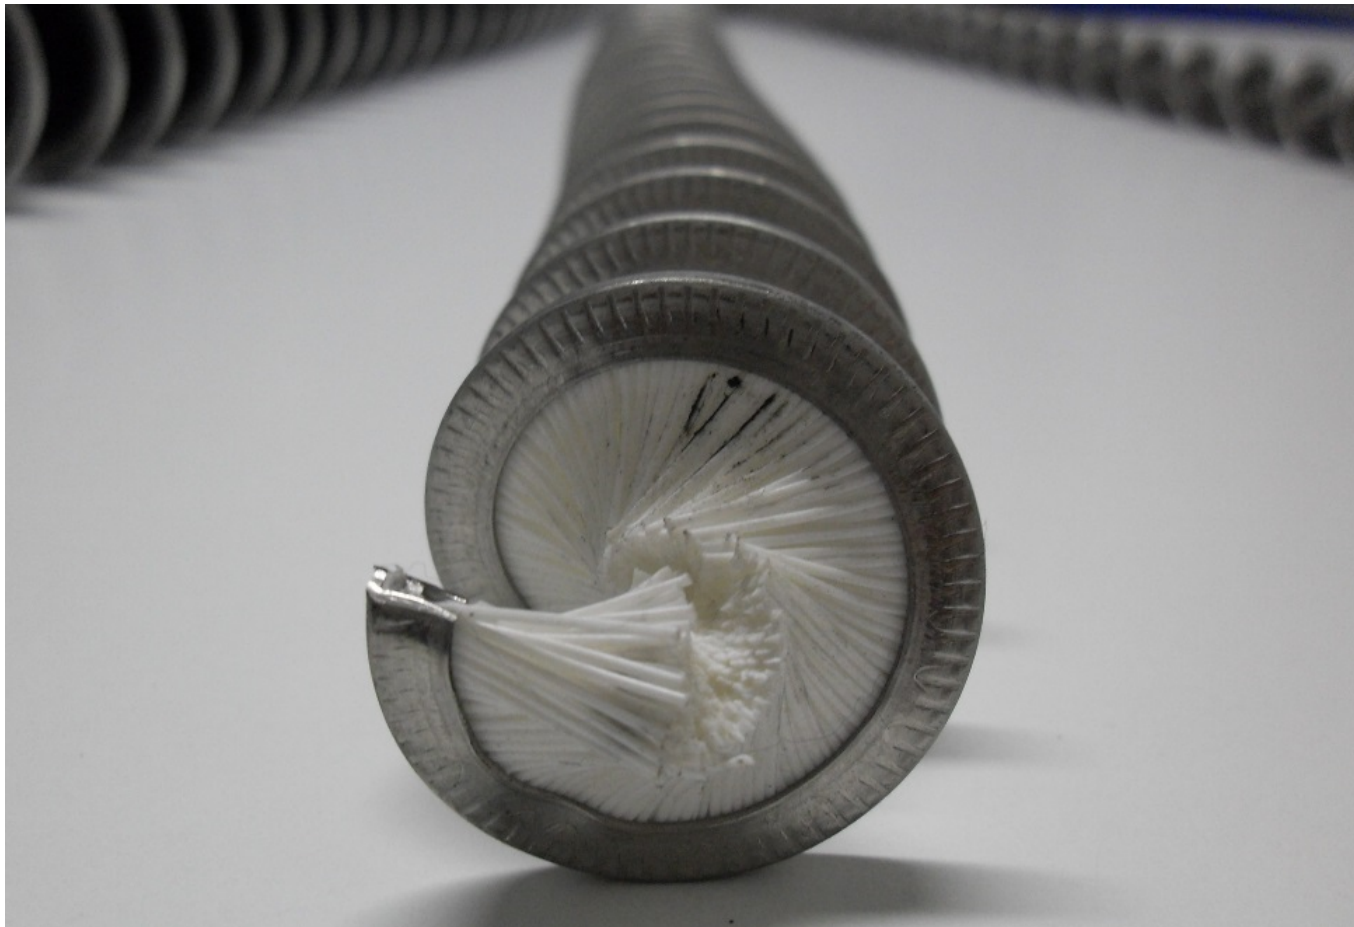

SP5734 NY-SS

Polypropylene

Diameter of bristles 0.40 mm - Acid Proof

Polypropylene bristles/stainless steel frame

External diameter: 57 mm

Turns 34

Application:

1. to remove residual lubricant and excess coating from wires
2. gently wipe and brush the surface even of softer metals
3. elimination of drag out or carry over from one bath to the next
4. these brushes can be used in acid alkaline systems



SP3034 SS

Stainless Steel

Stainless Steel bristles and frame - Acid Proof, diameter of bristles 0.20 mm

External diameter: 30 mm

Turns 34

Application:

1. for removal of residual scale and scale dust after breaking rolls before the drawing machine
2. removal of lubricant residuals in line to the drawing operation
3. removal of lubricant residual after acid pickling to reduce contamination of flux bath
4. this spiral brush can also be used in acid media



SP5834

Brass coated high carbon steel wire

Multiuse- Brass coated high carbon steel wire, diameter of bristles 0.22 mm

External diameter: 58 mm

Turns 34

Application:

1. for removal of residual scale and scale dust after breaking rolls before the drawing machine
2. removal of lubricant residuals in line to the drawing operation



SP4034

Brass coated high carbon steel wire

Multiuse- Brass coated high carbon steel wire, diameter of bristles 0.20 mm

External diameter: 40 mm

Turns 34

Application:

1. for removal of residual scale and scale dust after breaking rolls before the drawing machine
2. removal of lubricant residuals in line to the drawing operation



SP5839

Brass coated high carbon steel wire

Multiuse- Brass coated high carbon steel wire, diameter of bristles 0.22 mm

External diameter: 58 mm

Turns 39

Application:

1. for removal of residual scale and scale dust after breaking rolls before the drawing machine
2. removal of lubricant residuals in line to the drawing operation

